

General Advice on Processing of “Soarnol®”


As for processing of “Soarnol®”, processing with an equipment shown below is recommended. When you use other type of equipments, please contact us accordingly.

(1) Extruder: L/D=24-30


(2) Screw Design

CR=3.0-3.5

Plating: Chrome Plating or Nickel Alloy Plating

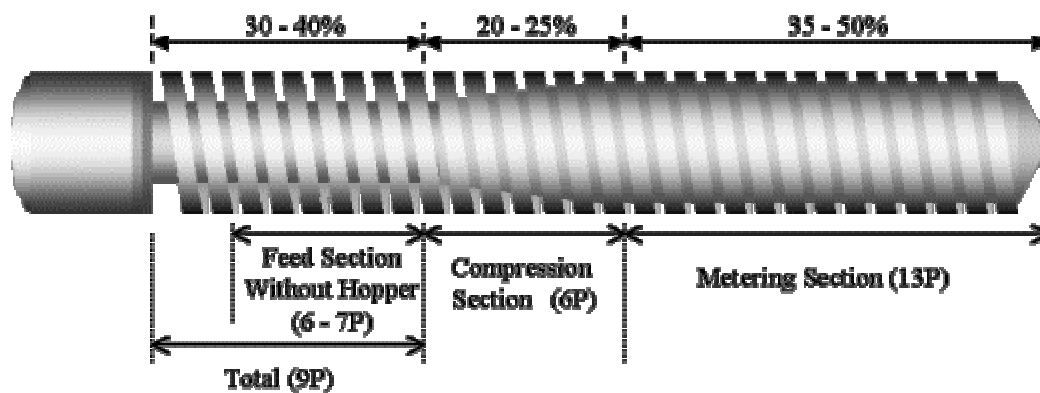

(3) Recommendable Temperature Profile of Extruder (Unit: deg C)

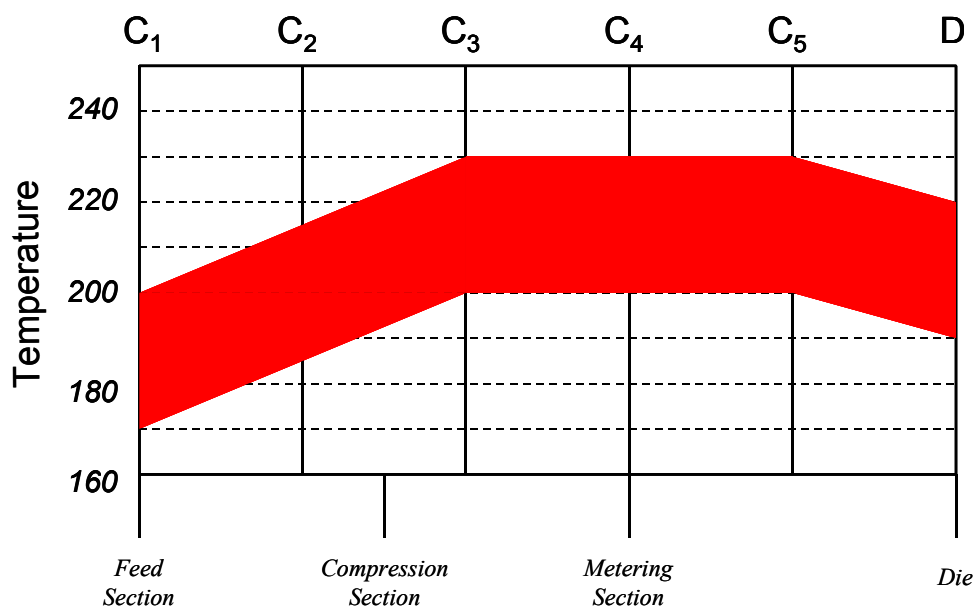

(4) Screen Pack

80/120 - 150/50 mesh

Data Prepared : 18 Sep. 2003