




Temperature Dependence of MFR

and Apparent Melt Viscosity

Temperature dependence of MFR and apparent melt viscosity with "SoarnoL™" is shown in the following. You can select suitable processing temperature with reference to the below.

Temperature dependence of MFR with typical "SoarnoL[™]"

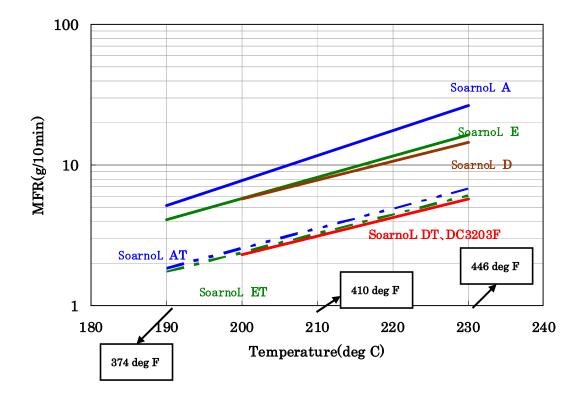

MITSUBISHI CHEMICAL CORPORATION

Advanced Polymers Business Domain, Performance Polymers Div. Soarnol Dept. 1-1, Marunouchi 1-Chome, Chiyoda-Ku, Tokyo 100-8251, Japan TEL +81-3-6748-7803 FAX +81-3-3286-1239

• The transcription of any data or information contained in this sheet without

prior written consent is strictly prohibited.

The information and data contained in this sheet are as of August, 2019.

[•] The content of this sheet may be changed without prior notice.

[•] Due to printing characteristics, the color tones may differ from the actual ones.






Temperature dependence of apparent melt viscosity with typical "SoarnoL[™]" (1)

32mol% and 38mol% "Soarno∟™" are shown below.

As for other grades, please see techinical data for each grade.

SoarnoL DC3203

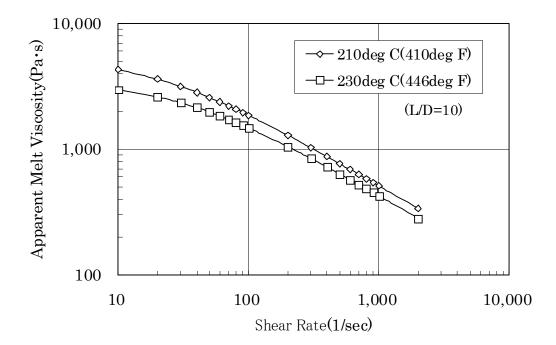

MITSUBISHI CHEMICAL CORPORATION

Advanced Polymers Business Domain, Performance Polymers Div. Soarnol Dept. 1-1, Marunouchi 1-Chome, Chiyoda-Ku, Tokyo 100-8251, Japan TEL +81-3-6748-7803 FAX +81-3-3286-1239

The information and data contained in this sheet are as of August, 2019.

• The transcription of any data or information contained in this sheet without

prior written consent is strictly prohibited.


[•] The content of this sheet may be changed without prior notice.

[•] Due to printing characteristics, the color tones may differ from the actual ones.





SoarnoL DC3212

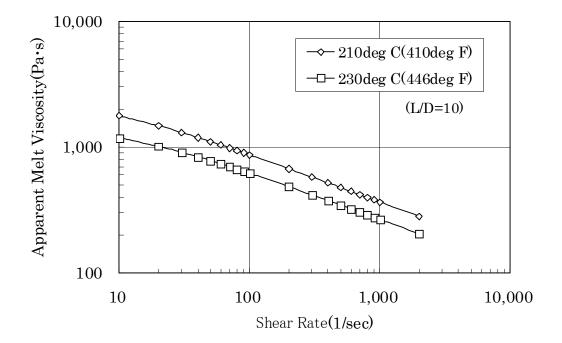

MITSUBISHI CHEMICAL CORPORATION

Advanced Polymers Business Domain, Performance Polymers Div. Soarnol Dept. 1-1, Marunouchi 1-Chome, Chiyoda-Ku, Tokyo 100-8251, Japan TEL +81-3-6748-7803 FAX +81-3-3286-1239

The information and data contained in this sheet are as of August, 2019.

Due to printing characteristics, the color tones may differ from the actual ones.
The transcription of any data or information contained in this sheet without

prior written consent is strictly prohibited.


[•] The content of this sheet may be changed without prior notice.





Temperature dependence of apparent melt viscosity with typical "SoarnoL[™]" (2)

SoarnoL ET3803

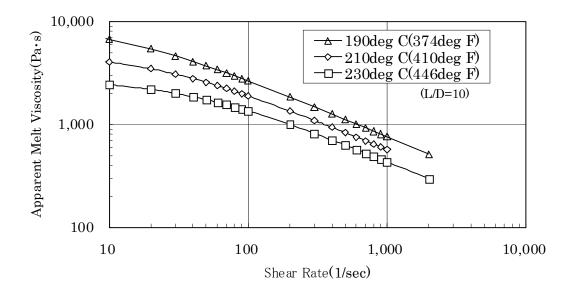

MITSUBISHI CHEMICAL CORPORATION

Advanced Polymers Business Domain, Performance Polymers Div. Soarnol Dept. 1-1, Marunouchi 1-Chome, Chiyoda-Ku, Tokyo 100-8251, Japan TEL +81-3-6748-7803 FAX +81-3-3286-1239

The information and data contained in this sheet are as of August, 2019.

prior written consent is strictly prohibited.


[•] The content of this sheet may be changed without prior notice.

<sup>Due to printing characteristics, the color tones may differ from the actual ones.
The transcription of any data or information contained in this sheet without</sup>





SoarnoL E3808

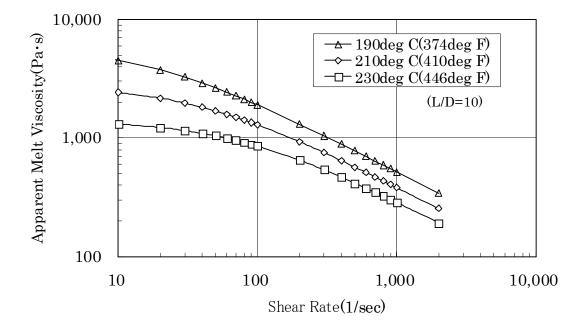

MITSUBISHI CHEMICAL CORPORATION

Advanced Polymers Business Domain, Performance Polymers Div. Soarnol Dept. 1-1, Marunouchi 1-Chome, Chiyoda-Ku, Tokyo 100-8251, Japan TEL +81-3-6748-7803 FAX +81-3-3286-1239

The information and data contained in this sheet are as of August, 2019.

Due to printing characteristics, the color tones may differ from the actual ones.
The transcription of any data or information contained in this sheet without

prior written consent is strictly prohibited.

[•] The content of this sheet may be changed without prior notice.